

Tag Line

Model 103

The Solinst Tag Line uses a weight attached to a laser marked cable or tape, and is principally designed for use during the installation of monitoring wells. The Tag Line also provides a simple method to measure the depth to the bottom of a well.


The Tag Line is perfect for use when installing Solinst Model 403 CMT Multilevel Systems, as you can easily measure the depth to the top of a backfill sand or bentonite layer during the completion of a well. It is also ideal as a multi-purpose marked support line.

The cable or tape is mounted on a sturdy free-standing reel with a carrying handle, weight holder and brake.

Laser Marked Cable

The Tag Line uses durable polyethylene coated 1/16" (1.6 mm) stranded stainless steel wireline with a minimum break strength of 270 lbs (122 kg). It comes in standard lengths of 100 ft. to 1000 ft. (30 m to 300 m). Other lengths are available by request.

Markings are clearly and accurately laser etched every 1/4 foot or every 5 centimeters of the cable. The laser markings allow the cable to run smoothly over the Tape Guide.

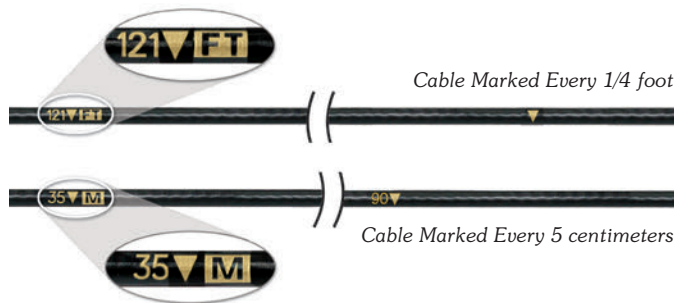


PVDF Laser Marked Tape

The Model 103 Tag Line is also available with 3/8" (10 mm) PVDF flat tape. The tape has a break strength of greater than 220 lbs (100 kg). It has a thick dog bone design that prevents adherence to wet surfaces, and allows it to hang straight.

The tape comes with laser markings every 1/100 ft. or each millimeter. Lengths are 100 ft to 1000 ft. (30 m to 300 m). Other lengths are available by request.

LM2: Feet and tenths: with markings every 1/100 ft.

LM3: Meters and centimeters: with markings every mm

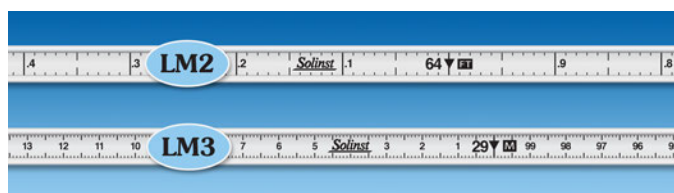

[Get Quote](#) | [More Info](#)


The Tag Lines uses a weight attached to either laser marked PVDF flat tape or polyethylene coated stainless steel wireline.

Applications Where Tag Lines Are Useful

- Accurately measure depth to backfill during well construction
- Measured safety support line for deployment of pumps, bailers, samplers and packers

316 Stainless Steel Tags

The standard stainless steel tag weight is 1.5 lbs (0.68 kg) and measures 3/4" x 1 ft. (19 mm x 30 cm). A narrow tag weight, 1/2" x 1 ft. (13 mm x 30 cm), weighing 0.65 lbs (0.30 kg), is also an option. Tag weights have tapered ends to minimize hang-ups during deployment and return to surface, and can be clipped on and off the cable or tape. This allows the use of the reel-mounted marked cable or tape for other uses.

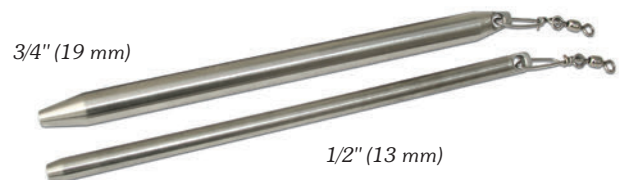

Tape Guide

A Tape Guide is provided with each Tag Line. It can be placed over the top of the well casing for ease of use and to protect from damage on rough edges. It can also increase reading accuracies.



® Solinst is a registered trademark of Solinst Canada Ltd.